


PAVING BREAKERS CLAY DIGGERS AND TRENCH DIGGERS

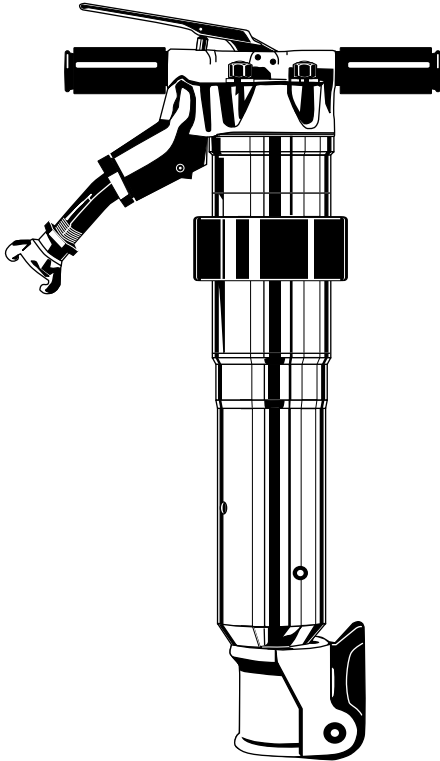

Fewer wearing parts, less maintenance, greater operator comfort, less fatigue, less air consumption, the Sullair paving breakers are designed for work efficiency and a long, trouble-free life.

High-Wear Parts Reduced

The Sullair breakers have eliminated most high-wear parts. Fewer parts mean less wear, less maintenance, and less downtime.

One Piece, Non-Protrusive Housing

A leakproof air cushion forms at the end of the piston stroke and stops the piston from direct impact when the tool is not breaking. The elimination of side rods, nuts and springs makes Sullair breakers sleeker and more comfortable to operate.

Minimal Lubrication Required

With only two parts moving during operation, normal oil carry-over from the compressor, combined with moisture in the air, will usually provide sufficient lubrication under normal operating conditions. Manual lubrication before storage is sufficient.

Direct Impact Piston

One moving impact part minimizes maintenance.

Parts Interchangeability

Standardization of design permits a high degree of interchangeability of parts between Sullair models.

Improved Latch Design

Durable double roll pin permits easy steel changing.

Quieter

The piston, impacting directly on the steel shank rather than a tappet, reduces noise level of the breaker.

Super-Silent Muffler

A unique silencer reduces noise levels by 6 dBA, while preventing the tool from freezing, even in the coldest climates.

Flex Handle Option

The flex handle option reduces up to 60% of the vibration to the operator without a loss of power.

Smoother Operation

Reduced kickback is less fatiguing to the operator.

Less Air Consumption

The direct impact piston design, non-corrosive automatic valve and one-piece housing dramatically reduce air consumption. You can operate more tools from a single compressor. For example, a 125 cfm compressor will operate two MPB 90 breakers from one compressor.

Two-Year Limited Warranty

All Sullair breaker parts are warranted for two years against manufacturing defects. Additionally should a part wear out during normal operation, it is covered by Sullair's exclusive two-year warranty.

PAVING BREAKERS, CLAY DIGGERS AND TRENCH DIGGERS

Model	Weight lbs	Length inch	Bore and Stroke inches	Blows/Minute	Air Consumption cfm	Air Inlet NPT	Shipping Weight lbs	Chuck Size
MPB-90A	90	27½"	27/16" x 59/32"	1380	62 cfm	¾"	95	1½" HX x 6" 1¼" HX x 6"
MPB-60A	67½	26½"	25/32" x 55/32"	1360	48 cfm	¾"	72	1½" HX x 6" 1¼" HX x 6"
MPB-35B	39	25½"	1¾" x 55/16"	1200	49 cfm	¾"	43	1" HX x 4¼"
MPB-30A	35½	23"	125/32" x 325/32"	1850	37 cfm	¾"	41	7/8" HX x 3¼" 1" HX x 4¼"
MPB-90AFG	97½	287/8"	27/16" x 59/32"	1380	62 cfm	¾"	103	1½" HX x 6" 1¼" HX x 6"
MPB-60AFG	75	287/8"	25/32" x 55/32"	1360	48 cfm	¾"	80	1½" HX x 6" 1¼" HX x 6"
MPB-90AS	92	271/8"	27/16" x 59/32"	1380	62 cfm	¾"	99	1½" HX x 6" 1¼" HX x 6"
MPB-60AS	69½	26¾"	25/32" x 55/32"	1360	48 cfm	¾"	77	1½" HX x 6" 1¼" HX x 6"
MPB-90AFSG	99	287/8"	27/16" x 59/32"	1380	62 cfm	¾"	106	1½" HX x 6" 1¼" HX x 6"
MPB-60AFSG	76½	28¼"	25/32" x 55/32"	1360	48 cfm	¾"	84	1½" HX x 6" 1¼" HX x 6"
MCD-30	33¾	24"	125/32" x 325/32"	1850	37 cfm	¾"	39	7/8" HX x 3¼" 1" HX x 4¼"
MTD-30	41	31¾"	125/32" x 325/32"	1850	37 cfm	¾"	44	7/8" HX x 3¼" 1" HX x 4¼"



ISO 9001 certification has been earned by the company's North American and European manufacturing facilities.



SULLAIR CORPORATION, Subsidiary of Sundstrand Corporation, 3700 East Michigan Blvd., Michigan City, IN 46360 Telephone: 1-800-SULLAIR or 1-219-879-5451 Fax: 1-219-874-1504
 SULLAIR EUROPE, Zone des Granges, BP 82, 42602 Montbrison, Cedex, France, Telephone: (33) 4.77.96.84.70 Fax: (33) 4.77.96.84.99
 SULLAIR ASIA LTD., 74 Joo Koon Circle, Jurong, Singapore 629093, Telephone: (65) 861-1211 Fax: (65) 861-2967 Telex RS25117
 SULLAIR ASIA, 1 Sullair Road, Chiwan, Shenzhen, China 518068, Telephone: (86) 755-6853477 or (86) 755-6851686 Fax: (86) 755-6853473
 SULLAIR TAIWAN LTD., 2nd Fl. No. 96, Chien Kuo N. Road, Taipei 104, Taiwan, Telephone: 886-2-505-7256, Fax: 886-2-505-5480
 SULLAIR ARGENTINA, Goncalves Dias 1145, 1276 Buenos Aires, Argentina, Telephone: 541-303-0621, Fax: 541-303-0626

Specifications subject to change without notice. © Copyright 1997 Sullair Corporation. All rights reserved.