

450H

CRAWLER DOZERS

SPECIFICATIONS



Engine	450H	450H LT	450H LGP
Type	John Deere 4045D naturally aspirated	John Deere 4045D naturally aspirated	John Deere 4045T with altitude-compensating turbocharger
Optional	John Deere 4045T with altitude-compensating turbocharger	John Deere 4045T with altitude-compensating turbocharger	
Rated power @ 2,200 rpm	70 SAE net hp (52 kW) and 73 SAE gross hp (54.5 kW)	70 SAE net hp (52 kW) and 73 SAE gross hp (54.5 kW)	74 SAE net hp (55 kW) and 79 SAE gross hp (59 kW)
Cylinders, wet sleeve	4	4	4
Displacement	276 cu. in. (4.52 L)	276 cu. in. (4.52 L)	276 cu. in. (4.52 L)
Fuel consumption, typical	1.5 to 2.3 gal./hr. (4.9 to 8.7 L/h)	1.5 to 2.3 gal./hr. (4.9 to 8.7 L/h)	1.5 to 2.3 gal./hr. (4.9 to 8.7 L/h)
Maximum net torque	223 lb.-ft. (302 Nm) @ 1,200 rpm	223 lb.-ft. (302 Nm) @ 1,300 rpm	254 lb.-ft. (345 Nm) @ 1,300 rpm
Lubrication	pressure system with full-flow spin-on filter and oil-to-water cooler		
Air cleaner	dual stage dry type with safety element, precleaner, and dash-mounted restriction indicator		
Electrical system	12 volt with 65-amp alternator		
Cooling fan	blower		

Transmission

Dual-path, electronic-controlled, hydrostatic drive; load-sensing feature automatically adjusts speed and power to match changing load conditions; each individual track is powered by a variable-displacement piston pump and two-speed motor combination; decelerator controls speed from holding to 5.0 mph (8.0 km/h)

Travel speeds (infinitely variable)

Forward and reverse0 to 5.0 mph (0 to 8.0 km/h)

Final Drives

Heavy-duty triple-reduction final drives attach directly to the mainframe and are isolated from track frame and dozer frame loads

Steering

Single-lever steering, direction control, and counterrotation; full power turns and infinitely variable track speeds provide unlimited maneuverability and optimum control; hydrostatic steering eliminates steering clutches and brakes

Brakes

Hydrostatic (dynamic) braking stops the machine whenever the direction-control lever is moved to neutral, whenever the decelerator is depressed to the end of travel, or whenever the brake pedal is depressed

Automatic Park Brake

Exclusive safety feature engages wet, multiple-disc brakes automatically whenever the engine stops, whenever the operator applies the brake pedal, or whenever the neutral start lever lock is in the stop position; machine cannot be driven with brake applied, reducing wear out or need for adjustment

Hydraulic System

Systemopen center

Pressure, main relief3,000 psi (20 685 kPa)

Pumpgear

Flow15 gpm (56.8 L/min.) @ 2,200 rpm

Filter, return oil10 micron

ControlT-bar three function

Cylindersheat-treated, chrome-plated, polished cylinder rods, hardened steel (replaceable bushings) pivot pins

Capacities (U.S.)

Fuel tank with lockable cap36 gal. (136 L)

Cooling system with coolant recovery tank17 qt. (16 L)

Engine oil including spin-on filter15 qt. (14 L)

Transmission reservoir refill with filter change11.3 gal. (42.7 L)

Final drive (each)7 qt. (6.6 L)

Hydraulic reservoir refill with filter change8.5 gal. (32.2 L)

All power train and hydraulic systems allow 45-degree maximum operation.

Undercarriage**450H****450H LT****450H LGP**

John Deere Dura-Trax™ features large deep-heat-treated components; pins and bushings are sealed for life; rollers and idlers are permanently sealed and lubricated; full-length track frame covers reduce material buildup and ease cleaning

Grouser width (closed center, single bar).....	16 in. (406 mm)	16 in. (406 mm)	24 in. (610 mm)
Track shoes, each side.....	37	40	40
Ground contact area.....	2,464 sq. in. (15 897 cm ²)	2,752 sq. in. (17 755 cm ²)	4,128 sq. in. (26 632 cm ²)
Ground pressure.....	6.1 psi (42.1 kPa)	5.6 psi (38.6 kPa)	4.0 psi (27.6 kPa)
Ground clearance with single-bar grouser (excluding grouser height).....	13.6 in. (346 mm)	13.6 in. (346 mm)	13.6 in. (346 mm)
Length of track on ground.....	77 in. (1956 mm)	86 in. (2184 mm)	86 in. (2184 mm)
Track gauge, standard.....	57 in. (1450 mm)	57 in. (1450 mm)	65 in. (1650 mm)
Track rollers, each side.....	5	6	6
Track pitch.....	6.29 in. (159.8 mm)	6.29 in. (159.8 mm)	6.29 in. (159.8 mm)

SAE Operating Weights

Base weights were computed for units with standard equipment, rollover protective structures, full fuel tanks, and 175-lb. (79 kg) operators.

97-in. (2464 mm) blade and 16-in. (406 mm) track shoes.....	15,000 lb. (6818 kg)	15,500 lb. (7045 kg)	
124-in. (3150 mm) blade and 24-in. (610 mm) track shoes.....			16,500 lb. (7500 kg)

Optional or Special Equipment

Add (+) or deduct (-) lb. (kg) as indicated to base weight for units with


Rock guards (4).....	257 lb. (117 kg)	288 lb. (131 kg)	288 lb. (131 kg)
14-in. (343 mm) track shoes.....	- 148 lb. (- 67 kg)		
Swamp shoes.....			160 lb. (72 kg)
Deluxe seat group.....	20 lb. (9 kg)	20 lb. (9 kg)	20 lb. (9 kg)
Cab with heater.....	590 lb. (268 kg)	590 lb. (268 kg)	590 lb. (268 kg)
Cab with air conditioning.....	675 lb. (306 kg)	675 lb. (306 kg)	675 lb. (306 kg)
Under-seat ROPS heater.....	26 lb. (12 kg)	26 lb. (12 kg)	26 lb. (12 kg)
Counterweight, rear (each).....	330 lb. (150 kg)	330 lb. (150 kg)	330 lb. (150 kg)
Counterweight, front (each).....	240 lb. (109 kg)	240 lb. (109 kg)	240 lb. (109 kg)
Lights, driving.....	3 lb. (1 kg)	3 lb. (1 kg)	3 lb. (1 kg)
Work lights, high intensity.....	9 lb. (4 kg)	9 lb. (4 kg)	9 lb. (4 kg)
Front tow hook.....	33 lb. (15 kg)	33 lb. (15 kg)	33 lb. (15 kg)
Retrieval hitch.....	50 lb. (23 kg)	50 lb. (23 kg)	50 lb. (23 kg)
Extended drawbar.....	72 lb. (33 kg)	72 lb. (33 kg)	72 lb. (33 kg)
Limb risers.....	229 lb. (104 kg)	229 lb. (104 kg)	229 lb. (104 kg)
Rear screen.....	76 lb. (35 kg)	76 lb. (35 kg)	76 lb. (35 kg)
Side screens.....	94 lb. (43 kg)	94 lb. (43 kg)	94 lb. (43 kg)
Screens, front and doors.....	179 lb. (81 kg)	179 lb. (81 kg)	179 lb. (81 kg)
4000S Winch.....	1,437 lb. (653 kg)	1,437 lb. (653 kg)	1,437 lb. (653 kg)
Winch fairlead, four roller.....	187 lb. (85 kg)	187 lb. (85 kg)	187 lb. (85 kg)
Parallelogram ripper.....	1,306 lb. (594 kg)	1,306 lb. (594 kg)	1,306 lb. (594 kg)
90-in. (2286 mm) blade, all-hydraulic heavy- duty C frame.....	38 lb. (17 kg)	38 lb. (17 kg)	
90-in. (2286 mm) blade, all-hydraulic standard C frame.....	- 58 lb. (- 26 kg)	- 58 lb. (- 26 kg)	
97-in. (2464 mm) blade, all-hydraulic heavy- duty C frame.....	96 lb. (43 kg)	96 lb. (43 kg)	
115-in. (2921 mm) blade, all-hydraulic heavy- duty C frame.....	370 lb. (168 kg)		5 lb. (2 kg)
All-hydraulic heavy-duty C frame (less blade).....	- 1,063 lb. (- 482 kg)	- 1,063 lb. (- 482 kg)	- 1,063 lb. (- 482 kg)

Dimensions (drawing on page 19)	450H	450H LT	450H LGP
A Overall height with ROPS or cab	102 in. (2590 mm)	102 in. (2590 mm)	102 in. (2590 mm)
B Overall length*	155 in. (3937 mm)	158 in. (4013 mm)	158 in. (4013 mm)
C Overall length with extended drawbar	162 in. (4114 mm)	160 in. (4064 mm)	160 in. (4064 mm)
D Overall length with winch**	177 in. (4496 mm)	177 in. (4496 mm)	177 in. (4496 mm)
E Ground clearance, minimum			
Single-bar grouser	13.6 in. (345 mm)	13.6 in. (345 mm)	13.6 in. (345 mm)
Swamp shoes	14.4 in. (366 mm)	14.4 in. (366 mm)	14.4 in. (366 mm)
F Blade lift height	30.4 in. (773 mm)	30.4 in. (773 mm)	30.4 in. (773 mm)
G Blade digging depth	20.8 in. (528 mm)	20.8 in. (528 mm)	20.8 in. (528 mm)
H Blade cutting edge angle, three position adjustable	52, 56, or 60 degrees	52, 56, or 60 degrees	52, 56, or 60 degrees

*For the 450H, add 1.3 in. (33.5 mm) to overall length with retrieval hitch. For the 450H LT and 450H LGP, there is no change to overall length with retrieval hitch.
**See page 19 for forestry application.

450H Blade Specs

I Width	90 in. (2286 mm)	90 in. (2286 mm)	
J Height	32.5 in. (826 mm)	32.5 in. (826 mm)	
SAE capacity	1.9 cu. yd. (1.4 m ³)	1.9 cu. yd. (1.4 m ³)	
K Blade angle	25.4 degrees	25.4 degrees	
L Angled width	82.9 in. (2106 mm)	82.9 in. (2106 mm)	
M Tilt	12.3 in. (313 mm)	12.3 in. (313 mm)	
N Cut reach	0	0	
O Width over track	73 in. (1854 mm)	73 in. (1854 mm)	
P Cast reach	10 in. (255 mm)	10 in. (255 mm)	
I Width	97 in. (2464 mm)	97 in. (2464 mm)	97 in. (2464 mm)
J Height	32.5 in. (826 mm)	32.5 in. (826 mm)	32.5 in. (826 mm)
SAE capacity	2.0 cu. yd. (1.5 m ³)	2.0 cu. yd. (1.5 m ³)	2.0 cu. yd. (1.5 m ³)
K Blade angle	25.4 degrees	25.4 degrees	22.2 degrees
L Angled width	89.3 in. (2267 mm)	89.3 in. (2267 mm)	91.2 in. (2318 mm)
M Tilt	13.3 in. (337 mm)	13.3 in. (337 mm)	13.3 in. (337 mm)
N Cut reach	3.1 in. (78 mm)	3.1 in. (78 mm)	1.6 in. (41 mm)
O Width over track	73 in. (1854 mm)	73 in. (1854 mm)	79 in. (2006 mm)
P Cast reach	13.2 in. (335 mm)	13.2 in. (335 mm)	10.6 in. (269 mm)
I Width	115 in. (2921 mm)	115 in. (2921 mm)	115 in. (2921 mm)
J Height	32.5 in. (826 mm)	32.5 in. (826 mm)	32.5 in. (826 mm)
SAE capacity	2.29 cu. yd. (1.75 m ³)	2.29 cu. yd. (1.75 m ³)	2.29 cu. yd. (1.75 m ³)
K Blade angle	25.4 degrees	25.4 degrees	25.4 degrees
L Angled width	105.5 in. (2680 mm)	105.5 in. (2680 mm)	105.5 in. (2680 mm)
M Tilt	15.8 in. (400 mm)	15.8 in. (400 mm)	15.8 in. (400 mm)
N Cut reach	10.6 in. (268 mm)	10.6 in. (268 mm)	2.6 in. (65 mm)
O Width over track	73 in. (1854 mm)	73 in. (1854 mm)	89 in. (2260 mm)
P Cast reach	22 in. (558 mm)	22 in. (558 mm)	14 in. (355 mm)
I Width	124 in. (3150 mm)	124 in. (3150 mm)	124 in. (3150 mm)
J Height	30.2 in. (767 mm)	30.2 in. (767 mm)	30.2 in. (767 mm)
SAE capacity	2.15 cu. yd. (1.64 m ³)	2.15 cu. yd. (1.64 m ³)	2.15 cu. yd. (1.64 m ³)
K Blade angle	25.4 degrees	25.4 degrees	25.4 degrees
L Angled width	113.7 in. (2887 mm)	113.7 in. (2887 mm)	113.7 in. (2887 mm)
M Tilt	17 in. (432 mm)	17 in. (432 mm)	17 in. (432 mm)
N Cut reach	6.8 in. (173 mm)	6.8 in. (173 mm)	6.8 in. (173 mm)
O Width over track	89 in. (2260 mm)	89 in. (2260 mm)	89 in. (2260 mm)
P Cast reach	17.9 in. (454 mm)	17.9 in. (454 mm)	17.9 in. (454 mm)

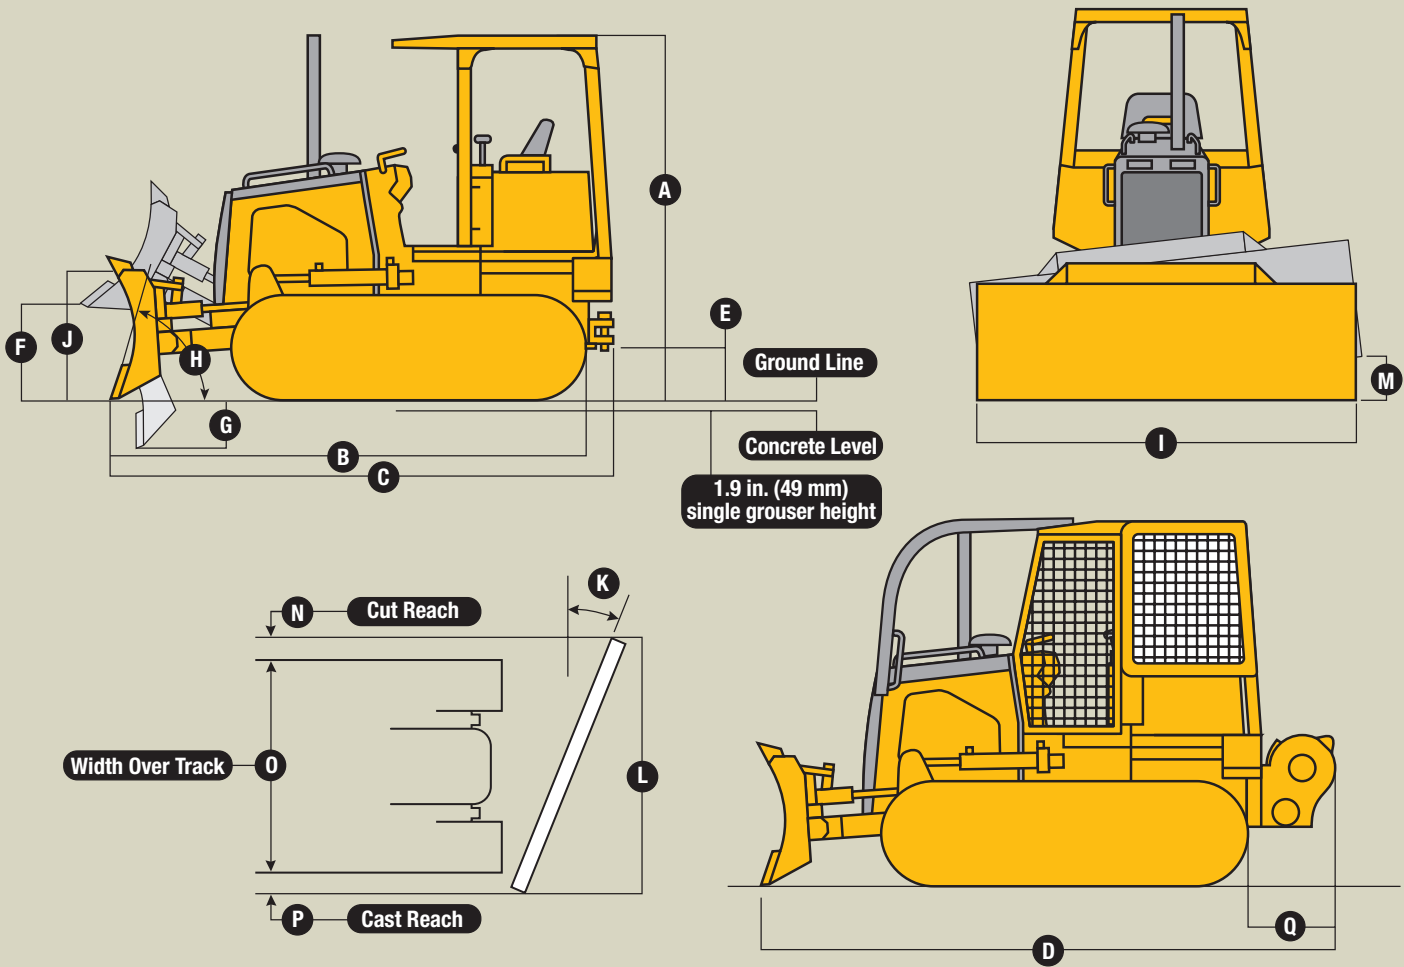

450H Forestry Application


Available limb risers and screens for the rollover protective structure, John Deere-built, self-contained 4000S Winch* for versatile skidding and clearing operations

- D** Overall length with winch**177 in. (4496 mm)
- Q** 4000S Winch length29.6 in. (752 mm)

*Reference 4000S Winch spec sheet.
**See page 18 for related dimensions.

Drawbar Pull

Crawler speed vs ground pull.....usable pull will depend on traction and weight of tractor

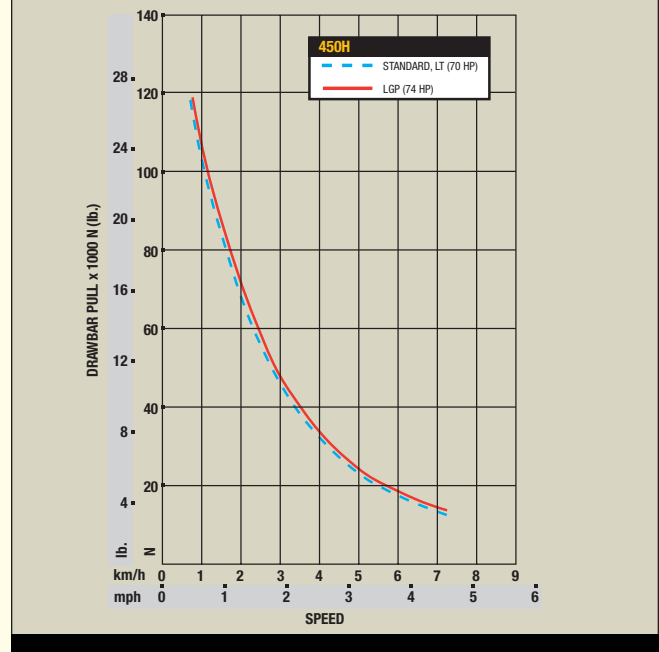

550H

CRAWLER DOZERS

SPECIFICATIONS



CONSTRUCTION EQUIPMENT

Engine

550H LT

550H LGP

Type	John Deere 4045T with altitude-compensating turbocharger	John Deere 4045T with altitude-compensating turbocharger
Rated power @ 2,200 rpm	80 SAE net hp (60 kW)	84 SAE net hp (63 kW)
Cylinders, wet sleeve	4	4
Displacement	276 cu. in. (4.52 L)	276 cu. in. (4.52 L)
Fuel consumption, typical	1.7 to 2.6 gal./hr. (6.4 to 9.8 L/h)	1.7 to 2.6 gal./hr. (6.4 to 9.8 L/h)
Maximum net torque	255 lb.-ft. (344 Nm) @ 1,200 rpm	276 lb.-ft. (372 Nm) @ 1,200 rpm
Lubrication	pressure system with full-flow spin-on filter and oil-to-water cooler	
Air cleaner	dual stage dry type with safety element, precleaner, and dash-mounted restriction indicator	
Electrical system	12 volt with 65-amp alternator	
Cooling fan	blower	

Transmission

Dual-path, electronic-controlled, hydrostatic drive; load-sensing feature automatically adjusts speed and power to match changing load conditions; each individual track is powered by a variable-displacement piston pump and two-speed motor combination; decelerator controls speed from holding to 5.0 mph (8.0 km/h)

Travel speeds (infinitely variable)

Forward and reverse0 to 5.0 mph (0 to 8.0 km/h)

Final Drives

Heavy-duty triple-reduction final drives attach directly to the mainframe and are isolated from track frame and dozer frame loads

Steering

Single-lever steering, direction control, and counterrotation; full power turns and infinitely variable track speeds provide unlimited maneuverability and optimum control; hydrostatic steering eliminates steering clutches and brakes

Brakes

Hydrostatic (dynamic) braking stops the machine whenever the direction-control lever is moved to neutral, whenever the decelerator is depressed to the end of travel, or whenever the brake pedal is depressed

Automatic Park Brake

Exclusive safety feature engages wet, multiple-disc brakes automatically whenever the engine stops, whenever the operator applies the brake pedal, or whenever the neutral start lever lock is in the stop position; machine cannot be driven with brake applied, reducing wear out or need for adjustment

Hydraulic System

System	open center
Pressure, main relief	3,000 psi (20 685 kPa)
Pump	gear
Flow	15 gpm (56.8 L/min.) @ 2,200 rpm
Filter, return oil	10 micron
Control	T-bar three function
Cylinders	heat-treated, chrome-plated, polished cylinder rods, hardened steel (replaceable bushings) pivot pins

Capacities (U.S.)

Fuel tank with lockable cap	47 gal. (178 L)
Cooling system with coolant recovery tank	17 qt. (16 L)
Engine oil including spin-on filter	15 qt. (14 L)
Transmission reservoir refill with filter change	11.3 gal. (42.7 L)
Final drive (each)	7 qt. (6.6 L)
Hydraulic reservoir refill with filter change	8.5 gal. (32.2 L)

All power train and hydraulic systems allow 45-degree maximum operation.

Undercarriage

550H LT

550H LGP

John Deere Dura-Trax™ features large deep-heat-treated components; pins and bushings are sealed for life; rollers and idlers are permanently sealed and lubricated; full-length track frame covers reduce material buildup and ease cleaning

Grouser width (closed center, single bar).....	18 in. (457 mm)	24 in. (610 mm)
Track shoes, each side.....	40	40
Ground contact area.....	3,096 sq. in. (19 974 cm ²)	4,128 sq. in. (26 632 cm ²)
Ground pressure.....	5.4 psi (37.2 kPa)	4.2 psi (29.0 kPa)
Ground clearance with single-bar grouser (excluding grouser height).....	13.6 in. (345 mm)	13.6 in. (345 mm)
Length of track on ground.....	86 in. (2184 mm)	86 in. (2184 mm)
Track gauge, standard.....	61 in. (1550 mm)	69 in. (1753 mm)
Track rollers, each side.....	6	6
Track pitch.....	6.29 in. (160 mm)	6.29 in. (160 mm)

SAE Operating Weights

Base weights were computed for units with standard equipment, rollover protective structures, full fuel tanks, and 175-lb. (79 kg) operators.

105-in. (2667 mm) blade and 18-in. (457 mm) track shoes.....	16,800 lb. (7636 kg)
128-in. (3251 mm) blade and 24-in. (610 mm) track shoes.....	17,500 lb. (7437 kg)

Optional or Special Equipment

Add (+) or deduct (-) lb. (kg) as indicated to base weight for units with

Rock guards (4).....	288 lb. (131 kg)	288 lb. (131 kg)
24-in. (610 mm) track shoes.....	in base	
24-in. (610 mm) swamp shoes.....	160 lb. (72 kg)	
Deluxe seat group.....	20 lb. (9 kg)	20 lb. (9 kg)
Cab with heater.....	630 lb. (285 kg)	630 lb. (285 kg)
Cab with air conditioning.....	660 lb. (299 kg)	660 lb. (299 kg)
Under-seat ROPS heater.....	26 lb. (12 kg)	26 lb. (12 kg)
Counterweight, rear (each).....	330 lb. (150 kg)	330 lb. (150 kg)
Counterweight, front (each).....	240 lb. (109 kg)	240 lb. (109 kg)
Lights, driving.....	3 lb. (1 kg)	3 lb. (1 kg)
Work lights, high intensity.....	9 lb. (4 kg)	9 lb. (4 kg)
Front tow hook.....	33 lb. (15 kg)	33 lb. (15 kg)
Retrieval hitch.....	50 lb. (23 kg)	50 lb. (23 kg)
Extended drawbar.....	72 lb. (33 kg)	72 lb. (33 kg)
Limb risers.....	229 lb. (104 kg)	229 lb. (104 kg)
Rear screen.....	76 lb. (35 kg)	76 lb. (35 kg)
Side screens.....	94 lb. (43 kg)	94 lb. (43 kg)
Screens, front and doors.....	179 lb. (81 kg)	179 lb. (81 kg)
4000S Winch.....	1,437 lb. (653 kg)	1,437 lb. (653 kg)
Winch fairlead, four roller.....	187 lb. (85 kg)	187 lb. (85 kg)
Parallelogram ripper.....	1,306 lb. (594 kg)	1,306 lb. (594 kg)
97-in. (2464 mm) blade, all-hydraulic heavy- duty C frame.....	- 151 lb. (- 68 kg)	
115-in. (2921 mm) blade, all-hydraulic heavy- duty C frame.....	- 38 lb. (- 17 kg)	
121-in. (3073 mm) blade, all-hydraulic heavy- duty C frame.....	22 lb. (10 kg)	
All-hydraulic heavy-duty C frame (less blade).....	- 1,212 lb. (- 550 kg)	- 1,373 lb. (- 623 kg)

Dimensions (drawing on page 23)**550H LT****550H LGP**


A Overall height with ROPS or cab	108 in. (2743 mm)	108 in. (2743 mm)
B Overall length*	159 in. (4040 mm)	159 in. (4040 mm)
C Overall length with extended drawbar	161 in. (4090 mm)	161 in. (4090 mm)
D Overall length with winch**	179 in. (4547 mm)	179 in. (4547 mm)
E Ground clearance, minimum		
Single-bar grouser	13.6 in. (345 mm)	13.6 in. (345 mm)
Swamp shoes	14.4 in. (366 mm)	14.4 in. (366 mm)
F Blade lift height	31.4 in. (797 mm)	31.4 in. (797 mm)
G Blade digging depth	20.6 in. (523 mm)	20.6 in. (523 mm)
H Blade cutting edge angle, three position adjustable	52, 56, or 60 degrees	52, 56, or 60 degrees

*For the 550H LT and 550H LGP, there is no change to overall length with retrieval hitch.

**See page 23 for forestry application.

550H Blade Specs

I Width	105 in. (2667 mm)
J Height	32.5 in. (826 mm)
SAE capacity	2.1 cu. yd. (1.6 m ³)
K Blade angle	22.2 degrees
L Angled width	98.7 in. (2507 mm)
M Tilt	14.3 in. (364 mm)
N Cut reach	5 in. (127 mm)
O Width over track	79 in. (2006 mm)
P Cast reach	14.7 in. (373 mm)
I Width	115 in. (2921 mm)
J Height	32.5 in. (826 mm)
SAE capacity	2.29 cu. yd. (1.75 m ³)
K Blade angle	22.2 degrees
L Angled width	107.9 in. (2742 mm)
M Tilt	15.7 in. (399 mm)
N Cut reach	2.4 in. (61 mm)
O Width over track	93 in. (2362 mm)
P Cast reach	12.5 in. (318 mm)
I Width	121 in. (3073 mm)
J Height	32.5 in. (826 mm)
SAE capacity	2.4 cu. yd. (1.83 m ³)
K Blade angle	22.2 degrees
L Angled width	114.4 in. (2906 mm)
M Tilt	16.5 in. (420 mm)
N Cut reach	5.7 in. (145 mm)
O Width over track	93 in. (2362 mm)
P Cast reach	15.7 in. (399 mm)
I Width	128 in. (3251 mm)
J Height	30.2 in. (767 mm)
SAE capacity	2.21 cu. yd. (1.69 m ³)
K Blade angle	22.2 degrees
L Angled width	120.9 in. (3070 mm)
M Tilt	17.5 in. (444 mm)
N Cut reach	9.1 in. (231 mm)
O Width over track	93 in. (2362 mm)
P Cast reach	18.8 in. (478 mm)

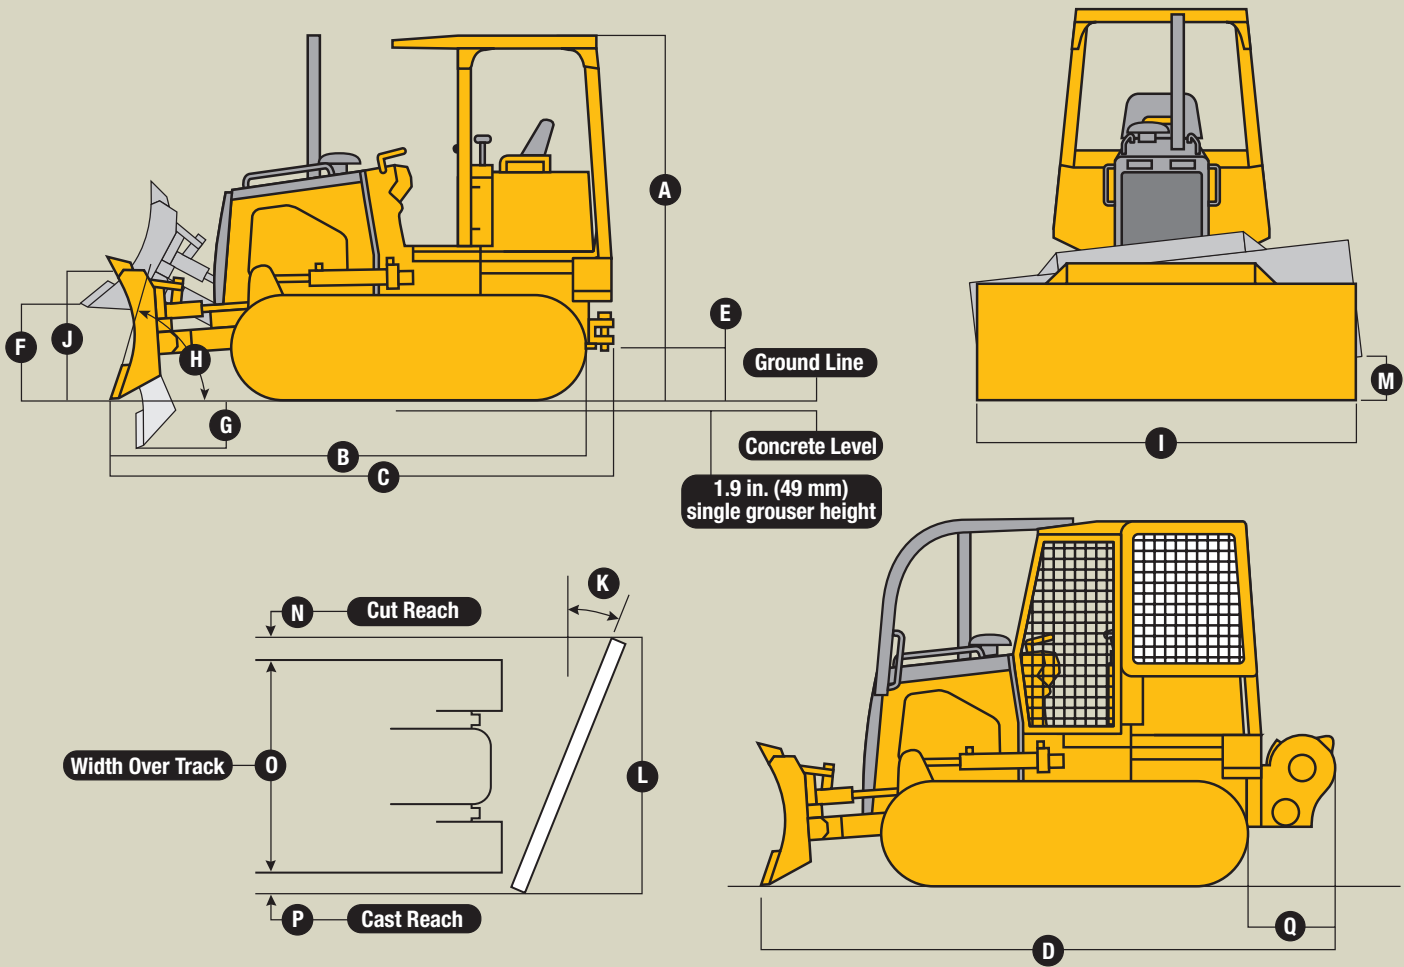

550H Forestry Application

Available limb risers and screens for the rollover protective structure, John Deere-built, self-contained 4000S Winch* for versatile skidding and clearing operations

D Overall length with winch**179 in. (4547 mm)


Q 4000S Winch length29.6 in. (752 mm)

*Reference 4000S Winch spec sheet.

**See page 22 for related dimensions.

Drawbar Pull

Crawler speed vs ground pull.....usable pull will depend on traction and weight of tractor

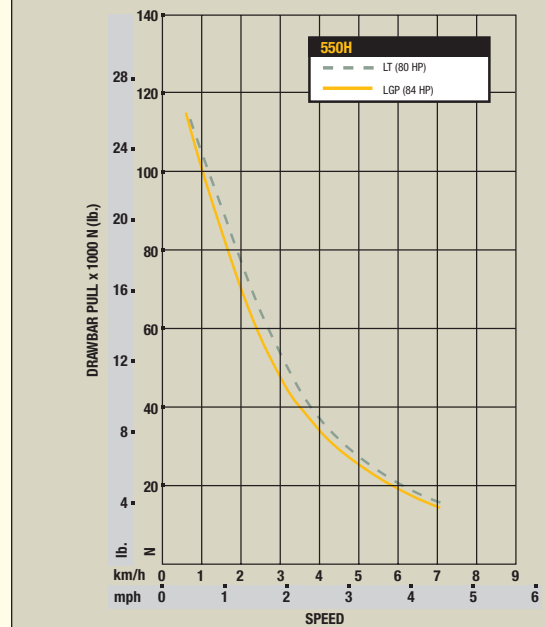

650H

CRAWLER DOZERS

SPECIFICATIONS



CONSTRUCTION EQUIPMENT

Engine

650H LT

650H LGP

Type	John Deere 4045T with altitude-compensating turbocharger	John Deere 4045T with altitude-compensating turbocharger
Rated power @ 2,200 rpm	90 SAE net hp (67 kW)	90 SAE net hp (67 kW)
Cylinders, wet sleeve	4	4
Displacement	276 cu. in. (4.52 L)	276 cu. in. (4.52 L)
Fuel consumption, typical	1.9 to 3.0 gal./hr. (7.2 to 11.9 L/h)	1.9 to 3.0 gal./hr. (7.2 to 11.9 L/h)
Maximum net torque	316 lb.-ft. (405 Nm) @ 1,200 rpm	316 lb.-ft. (405 Nm) @ 1,200 rpm
Lubrication	pressure system with full-flow spin-on filter and oil-to-water cooler	
Air cleaner	dual stage dry type with safety element, precleaner, and dash-mounted restriction indicator	
Electrical system	12 volt with 65-amp alternator	
Cooling fan	blower	

Transmission

Dual-path, electronic-controlled, hydrostatic drive; load-sensing feature automatically adjusts speed and power to match changing load conditions; each individual track is powered by a variable-displacement piston pump and two-speed motor combination; decelerator controls speed from holding to 5.0 mph (8.0 km/h)

Travel speeds (infinitely variable)

Forward and reverse0 to 5.0 mph (0 to 8.0 km/h)

Final Drives

Heavy-duty triple-reduction final drives attach directly to the mainframe and are isolated from track frame and dozer frame loads

Steering

Single-lever steering, direction control, and counterrotation; full power turns and infinitely variable track speeds provide unlimited maneuverability and optimum control; hydrostatic steering eliminates steering clutches and brakes

Brakes

Hydrostatic (dynamic) braking stops the machine whenever the direction-control lever is moved to neutral, whenever the decelerator is depressed to the end of travel, or whenever the brake pedal is depressed

Automatic Park Brake

Exclusive safety feature engages wet, multiple-disc brakes automatically whenever the engine stops, whenever the operator applies the brake pedal, or whenever the neutral start lever lock is in the stop position; machine cannot be driven with brake applied, reducing wear out or need for adjustment

Hydraulic System

System	open center
Pressure, main relief	3,000 psi (20 685 kPa)
Pump	gear
Flow	15 gpm (56.8 L/min.) @ 2,200 rpm
Filter, return oil	10 micron
Control	T-bar three function
Cylinders	heat-treated, chrome-plated, polished cylinder rods, hardened steel (replaceable bushings) pivot pins

Capacities (U.S.)

Fuel tank with lockable cap	47 gal. (178 L)
Cooling system with coolant recovery tank	17 qt. (16 L)
Engine oil including spin-on filter	15 qt. (14 L)
Transmission reservoir refill with filter change	11.3 gal. (42.7 L)
Final drive (each)	7 qt. (6.6 L)
Hydraulic reservoir refill with filter change	8.5 gal. (32.2 L)

All power train and hydraulic systems allow 45-degree maximum operation.

Undercarriage

650H LT

650H LGP

John Deere Dura-Trax™ features large deep-heat-treated components; pins and bushings are sealed for life; rollers and idlers are permanently sealed and lubricated; full-length track frame covers reduce material buildup and ease cleaning

Grouser width (closed center, single bar).....	18 in. (457 mm)	28 in. (711 mm)
Track shoes, each side.....	38	38
Ground contact area.....	3,132 sq. in. (20 206 cm ²)	4,872 sq. in. (31 432 cm ²)
Ground pressure.....	5.9 psi (40.6 kPa)	3.9 psi (27.0 kPa)
Ground clearance with single-bar grouser (excluding grouser height).....	14.3 in. (363 mm)	14.3 in. (363 mm)
Length of track on ground.....	87 in. (2210 mm)	87 in. (2210 mm)
Track gauge, standard.....	61 in. (1550 mm)	69 in. (1753 mm)
Track rollers, each side.....	6	6
Track pitch.....	6.73 in. (171 mm)	6.73 in. (171 mm)

SAE Operating Weights

Base weights were computed for units with standard equipment, rollover protective structures, full fuel tanks, and 175-lb. (79 kg) operators.

105-in. (2667 mm) blade and 18-in. (457 mm) track shoes.....	18,500 lb. (8390 kg)
128-in. (3251 mm) blade and 28-in. (711 mm) track shoes.....	19,100 lb. (8660 kg)

Optional or Special Equipment

Add (+) or deduct (-) lb. (kg) as indicated to base weight for units with

Rock guards (4).....	288 lb. (131 kg)	288 lb. (131 kg)
20-in. (508 mm) track shoes.....	174 lb. (79 kg)	- 980 lb. (- 450 kg)
24-in. (610 mm) track shoes.....		- 380 lb. (- 172 kg)
28-in. (711 mm) swamp shoes.....		158 lb. (71 kg)
Deluxe seat group.....	20 lb. (9 kg)	20 lb. (9 kg)
Cab with heater.....	630 lb. (285 kg)	630 lb. (285 kg)
Cab with air conditioning.....	660 lb. (299 kg)	660 lb. (299 kg)
Under-seat ROPS heater.....	26 lb. (12 kg)	26 lb. (12 kg)
Counterweight, rear (each).....	in base	330 lb. (150 kg)
Counterweight, front (each).....	in base	240 lb. (109 kg)
Lights, driving.....	3 lb. (1 kg)	3 lb. (1 kg)
Work lights, high intensity.....	9 lb. (4 kg)	9 lb. (4 kg)
Front tow hook.....	33 lb. (15 kg)	33 lb. (15 kg)
Retrieval hitch.....	50 lb. (23 kg)	50 lb. (23 kg)
Extended drawbar.....	72 lb. (33 kg)	72 lb. (33 kg)
Limb risers.....	229 lb. (104 kg)	229 lb. (104 kg)
Rear screen.....	76 lb. (35 kg)	76 lb. (35 kg)
Side screens.....	94 lb. (43 kg)	94 lb. (43 kg)
Screens, front and doors.....	179 lb. (81 kg)	179 lb. (81 kg)
4000S Winch.....	1,437 lb. (653 kg)	1,437 lb. (653 kg)
Winch fairlead, four roller.....	187 lb. (85 kg)	187 lb. (85 kg)
Parallelogram ripper.....	1,306 lb. (594 kg)	1,306 lb. (594 kg)
115-in. (2921 mm) blade, all-hydraulic heavy- duty C frame.....		- 134 lb. (- 61 kg)
121-in. (3073 mm) blade, all-hydraulic heavy- duty C frame.....		- 74 lb. (- 33 kg)
All-hydraulic heavy-duty C frame (less blade).....	- 1,384 lb. (- 628 kg)	- 1,470 lb. (- 667 kg)

Dimensions (drawing on page 27)**650H LT****650H LGP**

A Overall height with ROPS or cab	109 in. (2768 mm)	109 in. (2768 mm)
B Overall length*	161 in. (4089 mm)	160 in. (4064 mm)
C Overall length with extended drawbar	166 in. (4216 mm)†	162 in. (4115 mm)
D Overall length with winch**	179 in. (4547 mm)	179 in. (4547 mm)
E Ground clearance, minimum		
Single-bar grouser	14.3 in. (363 mm)	14.3 in. (363 mm)
Swamp shoes		15.1 in. (384 mm)
F Blade lift height	32.2 in. (819 mm)	32.2 in. (819 mm)
G Blade digging depth	19.7 in. (500 mm)	19.7 in. (500 mm)
H Blade cutting edge angle, three position adjustable	52, 56, or 60 degrees	52, 56, or 60 degrees


*For the 650H LT and 650H LGP, there is no change to overall length with retrieval hitch.

**See page 27 for forestry application.

†Includes rear counterweight.

650H Blade Specs

I Width	105 in. (2667 mm)
J Height	36.7 in. (933 mm)
SAE capacity	2.6 cu. yd. (2.0 m ³)
K Blade angle	22.2 degrees
L Angled width	98.7 in. (2507 mm)
M Tilt	14.3 in. (364 mm)
N Cut reach	4.7 in. (119 mm)
O Width over track	79 in. (2006 mm)
P Cast reach	15 in. (381 mm)
I Width	115 in. (2921 mm)
J Height	32.5 in. (826 mm)
SAE capacity	2.29 cu. yd. (1.75 m ³)
K Blade angle	22.2 degrees
L Angled width	107.9 in. (2742 mm)
M Tilt	15.7 in. (399 mm)
N Cut reach	0.4 in. (10 mm)
O Width over track	97 in. (2464 mm)
P Cast reach	10.5 in. (267 mm)
I Width	121 in. (3073 mm)
J Height	32.5 in. (826 mm)
SAE capacity	2.4 cu. yd. (1.83 m ³)
K Blade angle	22.2 degrees
L Angled width	114.4 in. (2906 mm)
M Tilt	16.5 in. (420 mm)
N Cut reach	3.7 in. (94 mm)
O Width over track	97 in. (2464 mm)
P Cast reach	13.7 in. (348 mm)
I Width	128 in. (3251 mm)
J Height	32.5 in. (826 mm)
SAE capacity	2.52 cu. yd. (1.93 m ³)
K Blade angle	22.2 degrees
L Angled width	120.9 in. (3070 mm)
M Tilt	17.5 in. (444 mm)
N Cut reach	6.9 in. (195 mm)
O Width over track	97 in. (2464 mm)
P Cast reach	17 in. (432 mm)

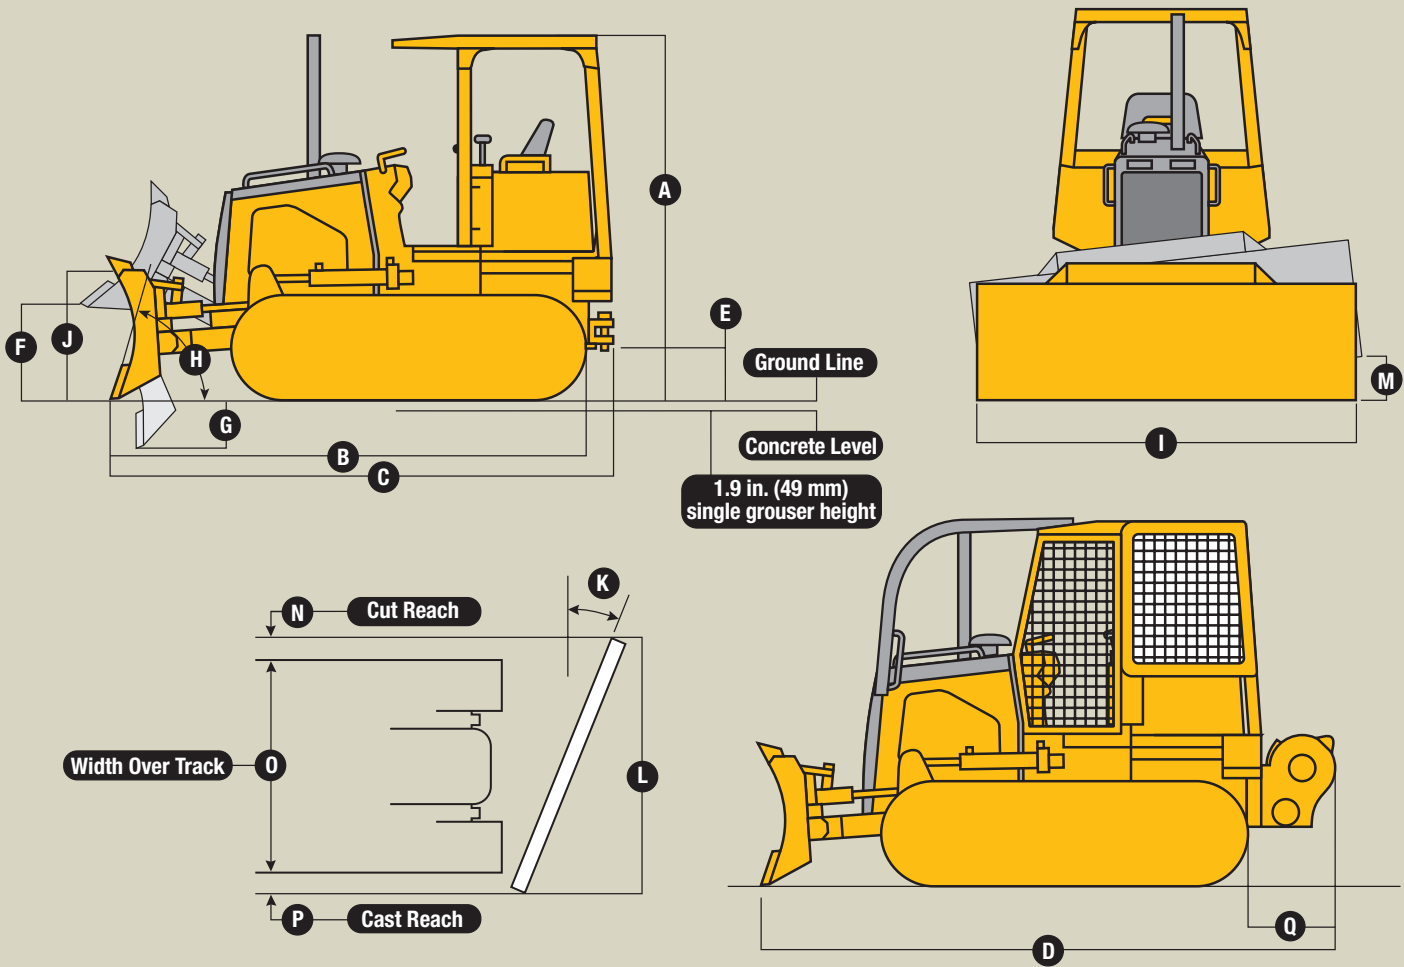

650H Forestry Application

Available limb risers and screens for the rollover protective structure, John Deere-built, self-contained 4000S Winch* for versatile skidding and clearing operations

D Overall length with winch**179 in. (4547 mm)

Q 4000S Winch length29.6 in. (752 mm)


R Overall height with limb risers111.5 in. (2832 mm)

*Reference 4000S Winch spec sheet.

**See page 26 for related dimensions.

Drawbar Pull

Crawler speed vs ground pull.....usable pull will depend on traction and weight of tractor

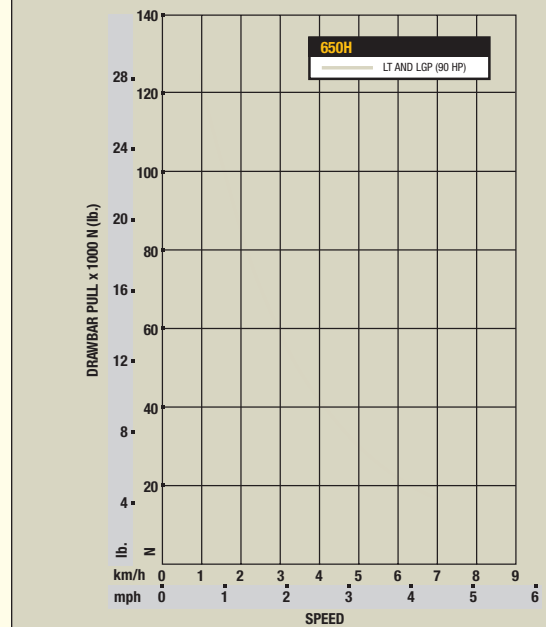

450H / 550H / 650H Crawler Dozers

Key: ● Standard equipment ▲ Optional or special equipment

*See your John Deere dealer for further information.

450 550 650 Engine

- ● ● Electric fuel shutoff, key start switch
- ● ● Oil-to-water engine oil cooler
- ● ● Vertical spin-on oil filter
- ● ● Vertical spin-on primary fuel filter with water separator
- ● ● Vertical spin-on final fuel filter
- ● ● Dual-element dry air cleaner, built-in precleaner, and evacuator valve
- ● ● Above-hood pre-screener/raincap
- ▲ ▲ ▲ External primary precleaner*
- ● ● Enclosed safety fan guard
- ● ● Coolant recovery tank
- ● ● Engine coolant to -34°F (-37°C)
- ● ● Blower-type cooling fan
- ● ● Trash-resistant seven-fin in-line radiator
- ▲ ▲ ▲ Radiator sand screen (steel)
- ● ● Under-hood muffler, vertical exhaust stack
- ● ● Pre-wired for ether start aid
- ▲ ▲ ▲ Electric ether start aid
- ▲ ▲ ▲ Coolant heater, 1,000 watts, 110 volts
- ▲ ▲ ▲ Coolant heater, fuel fired
- ▲ ▲ ▲ Steel-braid fuel lines*
- ▲ ▲ ▲ Manual fuel shutoff*

Powertrain and Controls

- ● ● Dual-path hydrostatic transmission
- ● ● Single-lever steering, F-N-R direction control
- ● ● Decelerator pedal, automatic retardation
- ● ● Engine-speed selection lever
- ● ● Infinite ground speed selection lever
- ▲ ▲ ▲ Ground speed in grip with speed ratio
- ● ● Automatic straight-ahead tracking
- ● ● Dynamic braking (anti-free wheel)
- ● ● Counterrotation
- ● ● Service-brake pedal
- ● ● Transmission neutral lock, safety start switch
- ● ● Automatic spring-applied, hydraulic-released parking brake
- ● ● Independent transmission oil reservoir with sight gauge
- ● ● Onboard diagnostics with visual display
- ● ● Oil-to-air transmission oil cooler
- ● ● Built-in final drive seal guards
- ● ● Triple-reduction final drives with wet multi-disc brakes
- ▲ ▲ ▲ Remote diagnostic test ports
- ● ● Maximum forward/reverse speed 5.0 mph (8.0 km/h)
- ● ● Automatic 15% increase in reverse speed from set forward speed
- ▲ ▲ ▲ Reverse speed set to 3.3 mph (5.2 km/h) maximum*
- ▲ ▲ ▲ Forward and reverse speed set to 3.3 mph (5.2 km/h) maximum*
- ▲ ▲ ▲ Maximum forward/reverse speed increased to 6.0 mph (9.6 km/h)*

C-Frames and Blades

- ● ● Six-way all-hydraulic C-frame with adjustable blade pitch
- ● ● Remote C-frame pivot grease banks

450 550 650 C-Frames and Blades (cont.)

- ● ● Cordura-covered hoses, conveniently replaceable lengths
- ● ● Straight end bits
- ● ● Pitch link, pitched mid-range
- ▲ ▲ ▲ Alternate pitch link, pitched forward
- ▲ ▲ ▲ Alternate pitch link, pitched back
- ▲ ▲ ▲ Special blades*
- ▲ ▲ ▲ Full-length spill sheet*
- ▲ ▲ ▲ Blade liner*

Electrical

- ● ● 12-volt system
- ● ● Fuse panel, blade-style multi-fused circuit breakers
- ● ● Electric horn
- ● ● Reverse warning alarm
- ● ● Electric fuel gauge
- ● ● Electric hourmeter
- ● ● Transmission oil pressure gauge
- ● ● Master electrical disconnect
- ● ● Positive battery terminal covers
- ● ● By-pass start safety cover at starter
- ● ● Electronic monitor, visual and audible warning
- ▲ ▲ ▲ Electronic monitor with additional gauges
- ● ● Ground-speed selection display
- ● ● Single 12-volt low-maintenance battery, 190-min. reserve capacity, 950 CCA
- ▲ ▲ ▲ Dual 12-volt low-maintenance batteries, 380-min. reserve capacity, 1,900 CCA
- ● ● 65-amp sealed alternator with ROPS
- ▲ ▲ ▲ 20-amp power port, for phone and radio
- ▲ ▲ ▲ Tachometer*

Hydraulic System

- ● ● 15-gpm fixed-displacement gear pump
- ▲ ▲ ▲ Pump, through-drive for winch or auxiliary pump
- ● ● Low-effort T-bar blade control
- ● ● Independent reservoir with sight gauge
- ● ● Vertical spin-on filter
- ● ● O-ring face seal connectors
- ● ● Three-function valve
- ▲ ▲ ▲ Four- and five-function valves with levers, without float*
- ▲ ▲ ▲ Four- and five-function valves with levers and float*
- ▲ ▲ ▲ Power-beyond section for front/rear attachments*
- ▲ ▲ ▲ Rear auxiliary plumbing

Undercarriage

- ● ● Single-flange rollers
- ▲ ▲ ▲ Double-flange rollers*
- ● ● Full-length track frame covers
- ● ● Chain guides, front and rear (bolt-on)
- ● ● Fully protected track-tension adjusters
- ● ● Solid sprockets
- ● ● Sprocket rock guards (bolt-on)
- ▲ ▲ ▲ Bolt-on full-length track-roller rock guards

450 550 650 Undercarriage (cont.)

- ▲ ▲ ▲ Sealed track chains
- ▲ ▲ ▲ Sealed and lubricated track chains
- ▲ ▲ ▲ Self-cleaning pyramid swamp shoes*
- ▲ ▲ ▲ Rubber or polymer track shoe pads*
- ▲ ▲ ▲ Open-center track shoes*
- ▲ ▲ ▲ Special track shoes*
- ▲ ▲ ▲ Special track gauge*
- ▲ ▲ ▲ Heavy-duty track idler springs*

Lights

- ▲ ▲ ▲ Grille-mounted driving lights (2), rear light (1), halogen, 2,000 candlepower each
- ▲ ▲ ▲ High-intensity work lights, front (2) and rear (2), with steel guards, 65 watts each*

Operator's Station

- ● ● Modular ROPS/FOPS canopy, isolation mounted (conforms to SAE J1040)
- ▲ ▲ ▲ Under-seat ROPS heater, 30,000 Btu/hr
- ▲ ▲ ▲ Modular ROPS/FOPS cab, isolation mounted (conforms to SAE J1040): Fresh air intake cab heater/defroster/pressurizer, 18,000 Btu/hr with air precleaner / Dome light / Deluxe headliner with molded air ducts for heater, defroster, and air conditioner / 30,000 Btu/hr under-seat heater / Front windshield and doors, wipers and washers / Tinted safety glass / Antenna for radio / 95-amp alternator
- ▲ ▲ ▲ Air conditioning, 24,000 Btu/hr
- ● ● Right and left access
- ● ● Slip-resistant front-mounting steps
- ● ● Ergonomically located handholds
- ● ● Headliner
- ● ● Floor mat
- ● ● Adjustable footrests
- ● ● Adjustable full-length armrests
- ● ● Built-in Operator's Manual storage
- ● ● Suspension vinyl seat (conforms to SAE J899): Fore and aft/weight and height combined adjustment / Adjustable leg support / Seat belt, 2 in. (51 mm), retractable with CRS (conforms to SAE J386)
- ▲ ▲ ▲ Deluxe suspension vinyl or cloth seat (conforms to SAE J899): Fore and aft/weight and height combined adjustment / Adjustable leg support / Adjustable backrest angle / Adjustable lumbar support / Adjustable seat-back extension / Seat belt, 3 in. (76 mm), retractable with CRS (conforms to SAE J386)
- ▲ ▲ ▲ Seat belt, 3 in. (76 mm), retractable with CRS (conforms to SAE J386)
- ● ● Convex interior rearview mirror
- ▲ ▲ ▲ Accessories: Convex wide-angle interior rearview mirror / Knee cushions (2) / Seat-side lockable storage box/lunch box/cup holder
- ▲ ▲ ▲ Rear window wiper and washer for cab
- ▲ ▲ ▲ AM/FM weatherband radio

450 550 650 Operator's Station (cont.)

- ▲ ▲ ▲ Complete enclosure ROPS-to-cab conversion panels
- ▲ ▲ ▲ Rear-and-side-only enclosures
- ▲ ▲ ▲ Front windshield and doors enclosure
- ▲ ▲ ▲ Fire extinguisher*

Overall Vehicle

- ● ● One-piece unitized construction mainframe
- ● ● Front tow loop (bolt-on)
- ● ● Reinforced engine and mid-frame bottom guards
- ● ● Integral transmission guard
- ● ● Heavy-duty louvered grille
- ● ● Perforated engine side shields
- ● ● Vandal protection lock provisions for: Engine service access cover / Fuel fill / Hydraulic reservoir fill/check / Transmission reservoir fill/check / Instrument panel
- ● ● Lockable grease gun/tool storage compartment in right access door
- ▲ ▲ ▲ Environmental drains
- ▲ ▲ ▲ Chrome exhaust stack
- ▲ ▲ ▲ Trademarks/decals, French or Spanish
- ▲ ▲ ▲ Transport lift and tie-down rings*

Protection Packages

- ▲ ▲ ▲ Extreme-duty louvered grille and hose protection
- ▲ ▲ ▲ Limb risers, arched or point-to-point
- ▲ ▲ ▲ Operator-protective rear screen
- ▲ ▲ ▲ Operator-protective side screens (ROPS)
- ▲ ▲ ▲ Operator-protective full-screen package
- ▲ ▲ ▲ Heavy-duty engine air-intake guard
- ▲ ▲ ▲ Air-conditioning module guard

Attachments

- ▲ ▲ ▲ Counterweight, rear, 330 lb. (150 kg) each
- ▲ ▲ ▲ Counterweight, front, 240 lb. (109 kg) each
- ▲ ▲ ▲ Retrieval hitch with pin
- ▲ ▲ ▲ Extended rigid drawbar with pin for pull-type implements
- ▲ ▲ ▲ Extended drawbar for winch
- ▲ ▲ ▲ Parallelogram ripper with five shank pockets and three teeth
- ▲ ▲ ▲ Standard or low-speed winch
- ▲ ▲ ▲ Power-in/out standard-speed winch
- ▲ ▲ ▲ Power-in/out low-speed winch
- ▲ ▲ ▲ Four-roller fairlead for winch
- ▲ ▲ ▲ Log arch for winch
- ▲ ▲ ▲ Automatic blade control*
- ▲ ▲ ▲ Skidding grapple*
- ▲ ▲ ▲ Root-rake blade attachment*
- ▲ ▲ ▲ Root rakes in place of blade*
- ▲ ▲ ▲ Fireline plow*
- ▲ ▲ ▲ Front- or rear-mounted hydraulic winch*
- ▲ ▲ ▲ Water tanks for fire suppression*
- ▲ ▲ ▲ Pull-type choppers*
- ▲ ▲ ▲ Cable plow*
- ▲ ▲ ▲ Pull-type scraper*
- ▲ ▲ ▲ Side boom*
- ▲ ▲ ▲ Roller compactor*



JOHN DEERE

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at standard conditions per SAE J1349 and DIN 6270B, using No. 2-D fuel at 35 API gravity. No derating is required up to 5,000-ft. (1500 m) altitude. Gross power is without cooling fan.

Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with standard equipment, rollover protective structures, full fuel tanks, and 175-lb. (79 kg) operators; 450H/LT units with 97-in. (2464 mm) blade and 16-in. (406 mm) track shoes; 450H LGP unit with 124-in. (3150 mm) blade; 450H LGP and 550H LGP units with 24-in. (610 mm) track shoes; 550H LT and 650H LT units with 105-in. (2667 mm) blade and 18-in. (457 mm) track shoes; 550H LGP and 650H LGP units with 128-in. (3251 mm) blade; and 650H LGP unit with 28-in. (711 mm) track shoes.

